


# TOLSEN

**35153**  
**GREEN-BEAM SELF-LEVELING**  
**360° HORIZONTAL CROSS-LINE LASER LEVEL**  
**35154**  
**GREEN-BEAM SELF-LEVELING**  
**TWO-PLANE LEVELING AND ALIGNMENT-LINE LASER**

RoHS FDA FC CE 



**SAVE THIS MANUAL!**  
 You will need this manual for safety instructions, operating procedures and warranty.  
 Put it and the original sales receipt in a safe dry place for future reference.

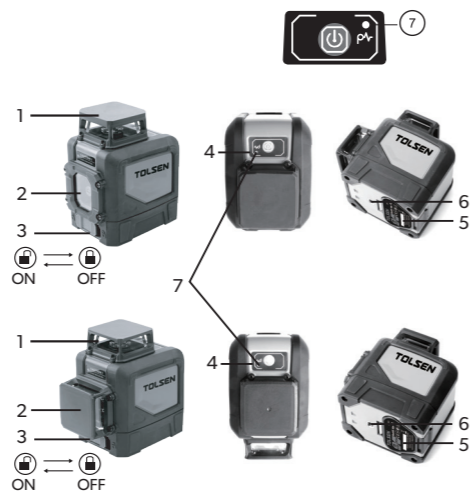

1. Window for horizontal coverage beam
2. Window for vertical coverage beam
3. Lock switch
4. Mode button
5. Battery compartment cover
6. 1/4"-20 threaded mount
7. LED indicator

## BEFORE YOU START

### General laser safety warnings



#### IMPORTANT:

- Please read this instruction manual carefully before using the product, and familiarise yourself with the operation, adjustments, and functions of the various switches.
- Consider and follow the safety and operating instructions in order to avoid possible risks and hazards.
- Keep these instructions for future use. If the product is passed on to a third party then these instructions must be included.

#### WARNING! Danger of permanent eye injury!

- Laser radiation! Do not stare into beam.
- Class II laser product.



#### WARNING!


- DO NOT operate the tool around children or pets, this product is not a toy and is not intended for use by children.
  - DO NOT remove or destroy any label appearing on this instrument.
  - DO NOT stare directly at the laser beam, as this can cause blindness. Only turn the laser ON when being used.
  - DO NOT place the tool in a position that may cause anyone to stare at the laser beam, whether intentionally or unintentionally, and ensure bystanders are aware of the dangers.
  - DO NOT point the laser beam emitted by the instrument at people or animals.
  - DO NOT point the laser onto shiny or reflective surfaces such as glass or polished metals, as this could reflect the beam back at the operator or passers by.
  - DO NOT attempt to modify the performance of this laser device in any way.
- This may result in a dangerous exposure to laser radiation.

#### CAUTION!

- DO NOT attempt to repair or disassemble the laser-measuring tool. If unqualified persons attempt to repair this product, serious injury may occur. Any repair required on this laser product should be performed only by qualified service personnel.
- DO NOT operate the tool in explosive environments, such as in the presence of flammable liquids, gases or dusts. Sparks can be created in the tool which may ignite the dust or fumes.
- ALWAYS turn off the instrument whenever it is not in use. Failure to do so will increase the possibility of someone inadvertently looking directly at the laser beam.
- DO NOT use optical instruments with this product, as this will increase risk of injury to the eyes.
- DO NOT use laser viewing glasses as safety goggles, as they do not protect the eyes against laser radiation.
- DO NOT use parts or accessories that have been designed for use with other laser tools, as this could result in serious injury or loss of performance.
- The accuracy or performance of the instrument may be reduced if it is used beyond its designed range, or in strong lighting conditions.
- DO NOT expose the product to shock, continuous vibration or extreme hot or cold temperatures, as this could damage the tool and/or cause serious injury to the user.
- ALWAYS handle the laser product with care. Treat it as you would any other optical device such as a camera or binoculars, and DO NOT touch the lens directly.

## To install batteries

1. This instrument requires 4 x 1.5V AA batteries.
2. Remove the battery compartment cover.
3. Insert the batteries paying attention to the polarity (+/-) marked on the compartment and batteries.
4. Close the battery compartment cover.

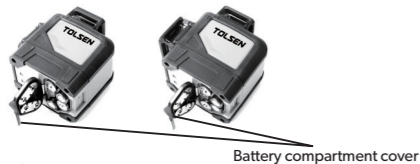

#### CAUTION!

- ALWAYS turn off the instrument before replacing the batteries.
- ALWAYS remove the batteries if the instrument is not to be used for extended periods.
- ALWAYS use high quality batteries of the same brand, type and age.
- If the instrument does not work properly, or the low battery icon is displayed, replace the batteries immediately.
- DO NOT expose the batteries or instrument to extreme temperatures or direct heat source, as this can cause the batteries to leak.
- If the batteries should leak, remove them using a cloth and dispose of them according to local regulations. Clean any leaked battery acid avoiding any contact with skin, eyes & mouth.
- If any contact does occur, rinse affected areas immediately with fresh water and seek medical advice.

## FUNCTIONS AND SETTINGS

### Operation instructions

Your self-levelling cross-line laser level has three working modes.

#### Self-levelling mode

In this mode, the tool will level itself if it is within  $\pm 4^\circ$  of horizontal.

1. Place the self-levelling cross-line laser level on a flat, smooth surface that is within  $\pm 4^\circ$  of horizontal.
2. Turn the tool on by sliding the Lock switch to ON position. The self-levelling cross-line laser level will automatically level within 5 seconds.
3. Press the mode button until the desired laser-projection mode is achieved and the laser line is projected from the laser aperture.
4. If the laser level is greater than  $\pm 4^\circ$ , the laser line will blink.
5. To turn off the laser lines, slide the Lock switch to OFF position. Press and hold the mode button until the laser shuts off.

#### Manual mode

This mode cannot be used to perform horizontal or vertical levelling, because the laser lines are no longer self-balancing.

In this mode, the laser line will flash every 3 seconds.

1. Keep the Lock switch off.
2. Press the mode button to turn the laser on and to change the laser-projection mode.
3. To turn the laser off, press and hold the mode button until the laser shuts off.

#### Pulse Mode

1. Full time Pulse

It is activated once the laser tool is turned On and allows use with laser detector.

#### 2. Outdoor Pulse

It is activated by a press and hold  $\geq 2$ seconds when the lock switch is in ON position. All available beams will flash rapidly 5 times to alert user, and LED indicator will turn on in solid blue. Another press and hold  $\geq 2$ seconds will deactivate the Outdoor Pulse Mode where all available beams will flash rapidly 5 times to alert user and the laser tool will get back to Full Time Pulse Mode and LED Indicator will turn off  
 Note: Outdoor Pulse Mode will allow use with laser detector in even brighter environments or at much greater working distances.

## CLEANING

- To ensure the instrument operates at optimal performance it should be regularly cleaned.
- ALWAYS switch the instrument OFF before cleaning.
- The housing can be cleaned with a damp cloth, taking care that no water enters the product.
- DO NOT immerse the electrical/optical parts of the product in water or other liquids, and never hold it under running water.
- Any lenses can be cleaned using a cotton bud with a small amount of distilled water or alcohol.
- After cleaning, ensure that all parts dry properly before use.
- The product should be stored carefully, so that it is protected from dust and scratches.



## TECHNICAL DATA

### 35153

Wavelength	520nm
Beam Accuracy	H/V Line $\pm 3$ mm/10m
Expanded Angle	C: 360° V: 130°
Max. working distance	30m(without detector)
Power Supply	4xAA battery
Operating time	C: 7.5h /V: 11.5h /C&V: 4.5h
Ingression Protection Rate	IP54
Operating Temperature	-10°C - +50°C
Storage Temperature	-20°C - +70°C
Model Function	witchable manual model

### 35154

Wavelength	520nm
Beam Accuracy	H/V Line $\pm 3$ mm/10m
Expanded Angle	H&V 360°
Max. working distance	30m(without detector)
Power Supply	4xAA battery
Operating time	1C: 8h /2C: 4h
Ingression Protection Rate	IP54
Operating Temperature	-10°C - +50°C
Storage Temperature	-20°C - +70°C
Model Function	switchable manual model

RoHS FDA FC CE 



SCAN TO VISIT  
 PRODUCT LINK  
 35153



SCAN TO VISIT  
 PRODUCT LINK  
 35154

SUZHOU TOLSEN  
 TOOLS CO., LTD.

www.tolsentools.com

TOLSEN is a trademark or registered trademark of TOLSEN TOOLS. All rights reserved.  
 MADE IN CHINA



TolsenWorld